Installation Instructions

- 1. Ensure your system is unplugged and carefully remove the screws from the faceplate of the control box.
- 2. Feed the blue connectors through the compression nut on the bottom of the box one at a time. They will not fit through together.
- 3. Lower the weight into the water. The bulb unit will follow. Be sure to handle the bulb with caution.

- 4. If you have multiple light assemblies, simply repeat steps 2 and 3 for remaining light assemblies.
- 5. Attach the photocell to the top of the box, taking care to align the prongs.
- 6. Plug the 10ft power cord with the inline GFCI into an approved GFCI outlet.
- 7. Wait for dark and enjoy!

Warning!

If for any reason the system should cease to function, disconnect the unit immediately as a safety precaution, then call 855-FISH-LIGHT.


DO NOT press the reset button on the GFCI plug.


Extend the Life of Your System

Your system should run continuously each night for optimal results and self-cleaning. A minimum of eight hours per night is required to keep growth off the bulb.

The bulbs must never be illuminated out of the water. They run the risk of overheating and failing.

Wire shield is the best way to protect against nicks in the wire caused by fish hooks or other aquatic life. Nicks in the wire are considered damage and not covered under the three-year manufacture warranty. You can purchase wire shield through our website.

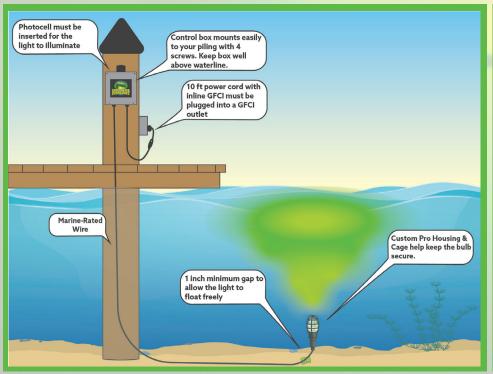

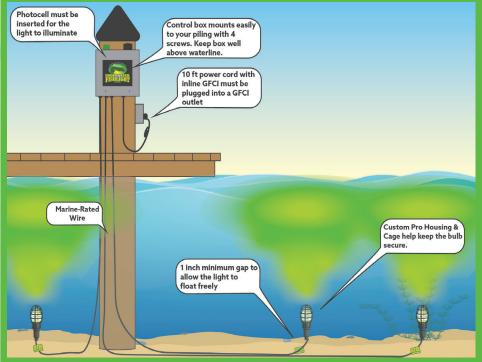



Thank you for your purchase!

We know you have many choices when it comes to underwater lighting, and we appreciate you choosing us!

What's in the box?

HID Light Assembly

2 Zip Ties

Safety Disclaimer

We take every precaution to ensure that we are offering a safe and reliable product. Our lights include a built-in GFCI plug and are required to be plugged into a GFCI outlet at all times. Even with these safety features in place, we must insist that you do not swim around these lights while they are plugged in. This is true with any 110 volt lighting system. While the lights are designed and tested to shut down if there is any interruption of the power supply, the possible risk of shock/injury/death is too great to take a chance. Please unplug the system(s) before entering the water. The manufacture/designer/seller of this product is not responsible for any injury/death/damage to property caused by the use of this product. Take any and all safety precautions when using this product. This system must be plugged into a UL approved GFCI outlet. The purchaser agrees to the above by purchasing this system. If you do not agree to these terms, please call us promptly to return your system for a full refund.

Fish Guaranteed!



855-FISH-LIGHT 855-347-4544 Info@fishlight.com 20400 Veterans Blvd Port Charlotte, FL 33954 FISHLIGHT.COM





INSTRUCTION PAMPHLET & OWNER'S MANUAL

Replacement Light Assembly

Underwater Fish Light



